




— Introduktion


Armaturen används för takbelysning eller arbetsbelysning exempelvis på kontoret, receptionen eller korridoren. D-line är anpassad till Gustafs taksystem, LINEAR SYSTEM för ett snabbt och enkelt montage.

D-line använder den senaste microprisman med högkvalitativa LED ljuskällor. Armaturen tillverkas av Luxlight i Göteborg.

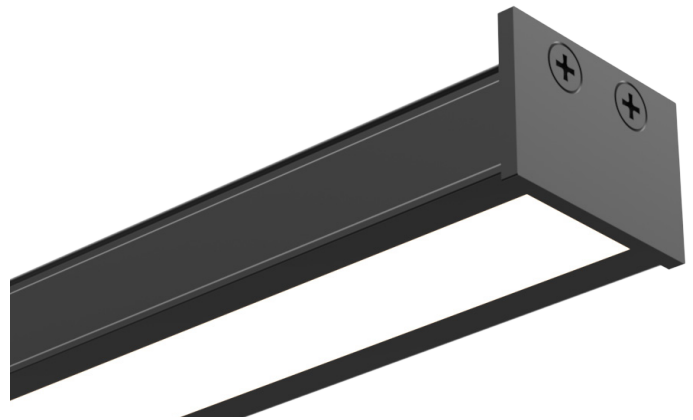

— Gustafs D-line

Technical specifications. This product is developed, produced and manufactured in Gothenburg, Sweden. Luxlight Skandinavien AB provides a guarantee period of five years. The guarantee period begins on the date when the product is delivered from our factory.

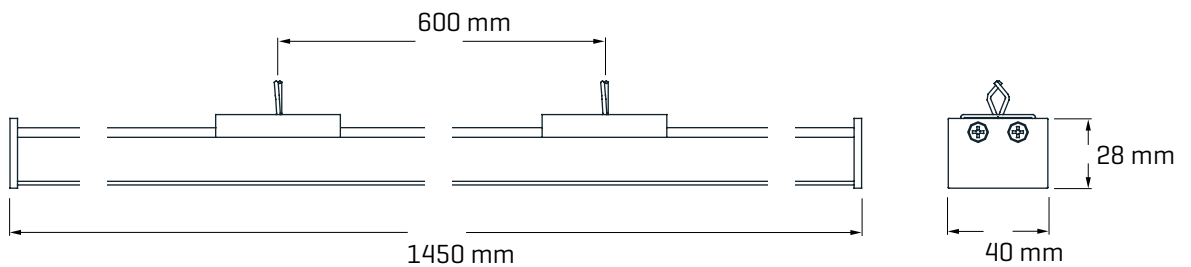

POWER

INPUT VOLTAGE	24V DC
MAXIMUM POWER	36 W

TEMP

OPERATING TEMP TC	-25 °C MIN +75 °C MAX
COOLING SYSTEM	CONVECTION

OPTICAL



COLOR TEMP	3000K	3500K	4000K
LUMINAIRE OUTPUT	2269 lm	2372 lm	2401 lm
RA/CRI	85	85	83
LED DEVICE	VARIOLED™ FLEX HYDRA HD25		
OPTICAL SYSTEM	65° Microprisms diffuse		
LED LIFE EXPECTANCY	> 60 000 HOURS (L80/B10)		
COLOR TEMPERATURE	3 MacAdam		
UGR [CIE 117]	21		

CONSTRUCTION

HOUSING	ANODIZED ALUMINUM [BLACK or SILVER]
WIRE SUSPENSION	AISI 304 STAINLESS
OPTICAL	PMMA CLEAR [ACRYLIC]
WEIGHT / m	1,3 KG
INGRESS PROTECTION	IP20

CONNECTION

POWER CABLE	LUXLIGHT LPC 2 X 0,5mm ² [Red + Black -]
-------------	---

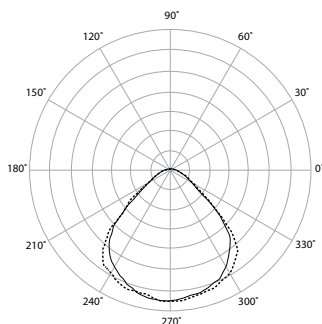

— Gustafs D-line Accessories

Model: Gustafs D-line Ribclip

Art no. 639-0200

